

11/07/00

JC715 U.S. PTO

# UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.63(b))

Attorney Docket No.

2000 1536A

Total Pages :

First Named Inventor or Application Identifier

Tsutomu TANAKA et al.

Express Mail Label No.:

 00  
 P  
 S  
 U  
 S  
 5  
 1  
 8  
 5  
 3  
 C

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

 Assistant Commissioner for Patents  
 Box Patent Application  
 Washington, D.C. 20231

1. ☒ Fee Transmittal Form  
*(Submit an original, and a duplicate for fee processing)*
2. ☒ Specification *[Total Pages - 47]*  
*(preferred arrangement set forth below)*
- Descriptive title of the Invention
  - Cross References to Related Applications
  - Statement Regarding Fed sponsored R & D
  - Reference to Microfiche Appendix
  - Background of the Invention
  - Brief Summary of the Invention
  - Brief Description of the Drawings *(if filed)*
  - Detailed Description
  - Claim(s)
  - Abstract of the Disclosure
3. ☒ Drawing(s) *(35 USC 113)* *[Total sheets - 12]*
4. ☒ Oath or Declaration *[Total Pages - 3]*
- a. 1. ☒ Newly executed (original or copy)
  - a. 2. ☐ Unexecuted
  - b. 1. ☐ Copy from a prior application (37 CFR 1.63(d))  
*(for continuation/divisional with Box 17 completed)*  
*[Note Box 5 below]*
  - i. 1. ☐ DELETION OF INVENTOR(S)  
 Signed statement attached deleting inventor(s)  
 named in the prior application, see 37 CFR  
 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference  
*(usable if Box 4b is checked)*  
 The entire disclosure of the prior application, from which  
 a copy of the oath or declaration is supplied under Box  
 4b, is considered as being part of the disclosure of the  
 accompanying application and is hereby incorporated by  
 reference therein.

6. Microfiche Computer Program *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission  
*(if applicable, all necessary)*
- a. 1. ☐ Computer Readable Copy
  - b. 1. ☐ Paper Copy (identical to computer copy)
  - c. 1. ☐ Statement verifying identity of above copies

## ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
*(When there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☒ Information Disclosure Statement (IDS)/PTO-1449  
☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)  
*(Should be specifically itemized)*
14. ☐ Small Entity Statement(s)
- ☐ Statement filed in prior application, Status still proper and desired
15. ☒ Certified Copy of Priority Document(s)  
*(if foreign priority is claimed)*
16. ☐ Other

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:
- ☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior Application No.

## 18. CORRESPONDENCE ADDRESS

WENDEROTH, LIND & PONACK, L.L.P.  
 2033 "K" Street, N.W.  
 Suite 800  
 Washington, D.C. 20006  
 Phone: (202) 721-8200  
 Fax: (202) 721-8255

November 7, 2000

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of :  
Tsutomu TANAKA et al. :  
Serial No. NEW : Attn: APPLICATION BRANCH  
Filed November 7, 2000 : Attorney Docket No. 2000\_1536A

CONTENT PROVIDING SYSTEM AND  
TERMINAL USED THEREIN

PATENT OFFICE FEE TRANSMITTAL FORM

Assistant Commissioner for Patents,  
Washington, DC 20231

Sir:

Attached hereto is a check in the amount of \$768.00 to cover Patent Office fees relating to filing the following attached papers:

New application ..... \$728.00  
Assignment for Recordal ..... \$ 40.00

A duplicate copy of this paper is being submitted for use in the Accounting Division, Office of Finance.

*The Commissioner is authorized to charge any deficiency or to credit any overpayment associated with this communication to Deposit Account No. 23-0975, with the EXCEPTION of deficiencies in fees for multiple dependent claims in new applications.*

Respectfully submitted,

Tsutomu TANAKA et al.

By Charles R. Watts  
Charles R. Watts  
Registration No. 33,142  
Attorney for Applicants

CRW/asd  
WENDEROTH, LIND & PONACK, L.L.P.  
2033 K St., N.W., Suite 800  
Washington, D.C. 20006  
Telephone (202) 721-8200  
November 7, 2000

[Check No. 44663]  
2000\_1536A

# TITLE OF THE INVENTION

## CONTENT PROVIDING SYSTEM AND TERMINAL USED THEREIN

### BACKGROUND OF THE INVENTION

#### 5 Field of the Invention

The present invention relates to content providing systems and terminals used therein and, more specifically, to a content providing system interrelating a to-be-broadcast first content and a second content stored on a network, and a terminal used  
10 therein.

#### Description of the Background Art

On ground-wave nationwide television broadcasting, programs are distributed by a key station to local stations for  
15 broadcast.

If broadcast over commercial network, those programs are inserted with commercial messages (CMs). Such insertion of CMs are done by the key station if the CMs are nationally targeted, and by the local stations if regionally targeted.

20 Recently, a communications network including Internet network and optical fiber network has been aggressively built, and e-commerce thereon has become quite popular (hereinafter, such communications network is referred to as network). Stored on such networks are Web sites for merchandise advertisement and  
25 order reception, allowing users to do shopping from home.

On BS digital broadcasting to be started from December, 2000, programs are to be broadcast nationwide directly from the key station via a satellite digital broadcasting network. Therefore, if the network is a commercial network, the key station still can  
5 insert the CMS but not the local station any more.

Here, those Web sites stored on the network are often found regional. Also, there is a possibility of newly providing a storage for storing the regional CMS on the network.

Accordingly, considered herein is inserting such regional  
10 Web sites and CMS stored on the network to the programs broadcast via the satellite digital broadcasting network.

#### SUMMARY OF THE INVENTION

Therefore, an object of the present invention is to  
15 implement a system interrelating a program coming via a satellite digital broadcasting network and regional CMS stored on a network.

The present invention has the following features to attain the object above.

A first aspect of the present invention is directed to a  
20 terminal for receiving a first content to be broadcast and fetching a second content stored on a network, and interrelating the received first content and the fetched second content with each other for reproduction and output, wherein

the second content is plurally stored on the network,  
25 the second content is assigned a URL indicating where the

second content is stored on the network, and

the first content is embedded with tag information used to specify the URL of the second content to interrelate the first and second contents with each other for reproduction and output,

5 and

the terminal comprises:

a reception part for receiving the first content;

a fetch part for fetching the second content on the network; and

10 a reproduction and output part for interrelating the first content received by the reception part and the second content fetched by the fetch part for reproduction and output, wherein

the fetch part refers to the tag information embedded in  
15 the first content received by the reception part to specify any one URL, and fetching the second content having the URL assigned.

As described above, in the first aspect (or in the later-described thirteenth aspect), a second content is assigned a URL indicating where the second content is stored on a network,  
20 while a first content to be broadcast is embedded with tag information, which is used to specify the URL of the second content to be interrelated with the first content for reproduction and output. Based on the tag information, the terminal specifies the URL, and then fetches the second content having the URL assigned.  
25 Therefore, the second content can be the one to be interrelated

with the received first content for reproduction and output. In this manner, a provider can interrelate a first content to be broadcast and a desired second content stored on the network with each other before providing those to a user.

5       According to a second aspect, in the first aspect,  
the first content is a program to be broadcast nationwide  
through a satellite broadcasting network,  
the second content is a regional CM,  
the tag information has a name or an identifier of a sponsor

10      and/or a product, and

the terminal further comprises:

a location storage part for storing location information  
indicating in which area the terminal is, wherein

as for the CM stored on the network, the fetch part refers  
15      to a table indicating the URL, the sponsor and/or the product,  
and a targeting area, and specifies the URL of the CM matching  
with the name or identifier of the sponsor and/or the product in  
the tag information embedded in the program received by the  
reception part, and with the area of the terminal.

20       As described above, in the second aspect (or in the  
later-described fourteenth aspect), tag information has a name  
or an identifier of a sponsor and/or a product and the terminal  
stores location information indicating in which area the terminal  
is. Once received a program, the terminal refers to a table  
25      indicating, as for each CM stored on the network, the URL, the

5 sponsor and/or the product, and a targeting area, and specifies the URL of the CM matching with the name or identifier of the sponsor and/or product in the tag information embedded in the program received by the reception part, and with the area of the terminal. In this manner, a provider can interrelate a program to be broadcast nationwide through a satellite broadcasting network with a regional CM of a desired sponsor and/or a product made specifically for the area where terminal is located (i.e., the area where a user of the terminal lives), and provide those

10 to users all over the country.

According to a third aspect, in the second aspect, the terminal further comprises a table storage part for storing the table, wherein the fetch part specifies, on its own, the URL by referring

15 to the table stored in the table storage part.

As described above, in the third aspect (or in the later-described fifteenth aspect), the terminal itself stores the table, and carries out URL specification based thereon.

According to a fourth aspect, in the second aspect, the

20 fetch part brings a name server, which has the table stored, to specify the URL by providing the tag information and the location information thereto.

As described above, in the fourth aspect (or in the later-described sixteenth aspect), the terminal brings a name

25 server having the table stored to perform URL specification by

providing the tag information and the location information thereto.

According to a fifth aspect, in the first aspect, the first content is scrambled, and

5 the second content is embedded with key information used to descramble the first content, and

the reproduction and output part

extracts the key information from the second content fetched by the fetch part,

10 descrambles the first content by the key information, and

interrelates the first and second contents with each other for reproduction and output.

As described above, in the fifth aspect (or in the

15 later-described twentieth aspect), the first content is scrambled, and the second content is embedded with key information used to descramble the first content. The terminal extracts the key information from the fetched second content, and descrambles the received first content thereby. In this manner, the terminal has

20 to fetch the second content, otherwise cannot reproduce and output the received first content.

Therefore, a provider can make the user watch the second content (typically a CM) with the first content (typically a program).

25 According to a sixth aspect, in the fifth aspect,



the second content is in a form of MPEG2 video stream,  
the key information is embedded in a user data region  
located in a predetermined layer of the MPEG2 video stream, and  
the reproduction and output part extracts the key  
5 information from the user data region.

As described above, in the sixth aspect, the second content  
is in a form of MPEG2 video stream, and the key information is  
embedded in a user data region located in a predetermined layer  
(e.g., group-of-picture layer, picture layer, or sequence layer)  
10 of the MPEG2 video stream.

According to a seventh aspect, in the sixth aspect, the  
predetermined layer is a group-of-picture layer.

According to an eighth aspect, in the sixth aspect, the  
predetermined layer is a picture layer.

15 According to a ninth aspect, in the sixth aspect, the  
predetermined layer is a sequence layer.

According to a tenth aspect, in the fifth aspect,  
the second content is in a form of MPEG2 video stream,  
the key information is embedded in the MPEG2 video stream  
20 by digital watermark, and

the reproduction and output part decodes the MPEG2 video  
stream, and extracts the key information therefrom.

As described above, in the tenth aspect, the second content  
is in the form of MPEG2 video stream, and the key information is  
25 embedded therein by digital watermark. In this case, the MPEG2

video stream has to be decoded, otherwise the key information cannot be extracted. Thus, the second content is assuredly watched by the user.

According to an eleventh aspect, in the first aspect,  
5 the second content is predetermined by a timing for output, and

the fetch part prefetches the second content before the timing to allow the reproduction and output part to output the second content with the timing.

10 As described above, in the eleventh aspect, the second content is prefetched before the timing predetermined for output thereof.

According to a twelfth aspect, in the first aspect,  
the tag information has the URL of the second content to  
15 be interrelated with the first content for reproduction and output, and

the fetch part fetches the second content having the URL found in the tag information assigned.

As described above, in the twelfth aspect (in the  
20 later-described twenty-first aspect), the tag information embedded in the received first content has the URL, and the terminal fetches the second content having the URL assigned.

A thirteenth aspect of the present invention is directed to a content providing system for interrelating a first content  
25 to be broadcast and a second content stored on a network, the system

comprising:

a broadcast device for broadcasting the first content;

a storage which is provided on the network, and stores a plurality of the second contents; and

5 a terminal for receiving the first content broadcast by the broadcast device and fetching the second content from the storage, and interrelating the received first content and the fetched second content with each other for reproduction and output, wherein

10 the second content is assigned a URL indicating where the second content is stored on the network,

the broadcast device embeds, in the first content, tag information used to specify the URL of the second content to be interrelated with the first content with each other for  
15 reproduction and output, and

the terminal specifies any one URL based on the tag information embedded in the received first content, and fetches the second content having the URL assigned.

According to a fourteenth aspect, in the thirteenth aspect,  
20 the first content is a program to be broadcast nationwide through a satellite broadcasting network,

the second content is a regional CM,

the tag information has a name or an identifier of a sponsor and/or product, and

25 the terminal

knows its own location, and

refers to, as for the CM stored in the storage, a table indicating the URL, the sponsor and/or the product, and a targeting area, and specifies the URL of the CM matching with the  
5 name or identifier of the sponsor and/or product in the tag information embedded in the program received by the reception part, and with the area of the terminal.

According to a fifteenth aspect, in the fourteenth aspect, the terminal

10 further stores the table, and specifies the URL on its own.

According to a sixteenth aspect, in the fourteenth aspect, the content providing system further comprises a name server having the table stored, wherein

15 the terminal brings the name server to specify the URL by providing the tag information and the location information thereto, and

the name server specifies the URL, and responds the URL back to the terminal.

20 According to a seventeenth aspect, in the fifteenth aspect, the broadcast device further broadcasts the table, and the terminal receives and stores the table broadcast by the broadcast device.

As described above, in the seventeenth aspect, in addition  
25 to the program, the table is broadcast. The terminal then

receives and stores the table.

According to an eighteenth aspect, in the fifteenth aspect, the broadcast device further broadcasts the table, and the terminal

5 receives the table broadcast by the broadcast device, selects, from the received table, only information relevant to the area of the terminal based on the location information stored therein, and

stores a newly-generated table including the selected  
10 information only.

As described above, in the eighteenth aspect, in addition to the program, the table is broadcast. The terminal then receives the table, selects only information relevant to the area of the terminal, and then stores the newly-generated table having  
15 only the selected information. Accordingly, the amount of information stored in the terminal is reduced.

According to a nineteenth aspect, in the thirteenth aspect, the second content is predetermined with a timing for output, and

20 the broadcast device embeds the tag information in a temporal position in the first content where the terminal can fetch the second content before the timing.

As described above, in the nineteenth aspect, the second content is predetermined by a timing for output. The broadcast  
25 device embeds the tag information in a temporal position of the

first content where the terminal can prefetch the second content before the timing. Therefore, the terminal can output the second content with the timing.

According to a twentieth aspect, in the thirteenth aspect,  
5 the first content is scrambled,

the broadcast device gives, to the storage, key information used to descramble the first content before broadcasting the first content, and

the storage embeds the given key information in the second  
10 content stored therein, and

the terminal

extracts the key information from the second content fetched from the storage,

descrambles the first content by the key information,  
15 and

interrelates the first and second contents with each other for reproduction and output.

According to a twenty-first aspect, in the thirteenth aspect,

20 the tag information has the URL of the second content to be interrelated with the first content to be broadcast by the broadcast device for reproduction and output, and

the terminal fetches, from the storage, the second content corresponding to the URL.

25 These and other objects, features, aspects and advantages

of the present invention will become more apparent from the following detailed description of the present invention when taken in conjunction with the accompanying drawings.

## 5 BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block diagram showing the structure of a TV commerce system according to one embodiment of the present invention;

FIG. 2 is a bit map showing the structure of a first content  
10 (program) to be broadcast by a TV broadcast device 2 in FIG. 1;

FIG. 3 is a bit map showing the structure of a second content (CM) to be stored in a CM storage 3 in FIG. 1;

FIG. 4 is a flowchart showing, in brief, the comprehensive operation of the entire system in FIG. 1;

15 FIG. 5 is a flowchart showing, in brief, the operation (step S9 in FIG. 4) of a TV commerce terminal 1 in FIG. 1;

FIG. 6 is a block diagram showing the specific structure of the TV commerce terminal 1 in FIG. 1;

FIG. 7 is a flowchart showing the specific operation  
20 (processing procedure of an MPU 160 in FIG. 6) of the TV commerce terminal 1 in FIG. 1;

FIG. 8 is a flowchart showing, in detail, step S35 in FIG. 7, i.e., second content fetch processing carried out by the MPU 160 in FIG. 6;

25 FIG. 9 is a flowchart showing step S41 in FIG. 8, i.e.,

exemplary URL specification processing (in the case that tag information has "sponsor" code, and the MPU 160 itself specifies URL) carried out by the MPU 160 in FIG. 6;

FIG. 10 shows a specific example of URL table stored in a  
5 memory part 180 in FIG. 6;

FIG. 11 shows a national URL table (upper; identical to the table of FIG. 10), and a regional URL table (lower) which is generated based on the upper;

FIG. 12 is a flowchart showing step S41 in FIG. 8, i.e.,  
10 another exemplary URL specification processing (in the case that tag information has "sponsor" code, and the MPU 160 asks a name server 7 for URL specification) carried out by the MPU 160 in FIG. 6;

FIG. 13 is a flowchart showing step S41 in FIG. 8, i.e.,  
15 still another exemplary URL specification processing (in the case that tag information has "product" code, and the MPU 160 asks the name server 7 for URL specification) carried out by the MPU 160 in FIG. 6;

FIG. 14 shows an exemplary URL table embedded in a program  
20 as tag information;

FIG. 15 shows an exemplary advertisement period table embedded in a program as tag information; and

FIG. 16 shows an exemplary user's watching status table embedded in a program as tag information.



## DESCRIPTION OF THE PREFERRED EMBODIMENTS

Hereinafter, an embodiment of the present invention is described by referring to accompanying drawings.

(First Embodiment)

5           FIG. 1 is a block diagram showing the structure of a TV commerce system according to the embodiment of the present invention. In FIG. 1, the TV commerce system is structured by a TV commerce terminal 1, TV broadcast device 2, and CM storage 3.

10           The TV commerce terminal 1 is placed in a user's house who watches a digital TV program, and is connected to a TV 4. The CM storage 3 is placed in a local advertising agency, and connected to the user's TV commerce terminal 1 over a network 5 such as Internet network and optical fiber network. The TV broadcast  
15 device 2 is placed in a broadcasting station, from which digital TV programs are broadcast to users all over the country over a satellite digital broadcasting network 6. The satellite broadcasting network is the one using broadcast/communications satelllites.

20           The TV broadcast device 2 is connected to the CM storage 3 placed in the regional advertising agency via the network 5 or a dedicated circuit.

FIG. 2 is a bit map showing the structure of a first content (program) to be broadcast by the TV broadcast device 2 of FIG.

25 1. In FIG. 2, the first content includes a video/audio signal

and tag information of a program. The video/audio signal has been scrambled, and thus requires a descramble key to make the program available for the user.

Here, a plurality of CMs are presumed to be inserted in a  
5 one-hour program whenever predetermined. For example, when 12 CMs are ready for the program, 4 of them are inserted at the beginning of the program, another 4 after 20 minutes, and the rest after 40 minutes.

The tag information interrelates the first content and a  
10 second content (CM) with each other. Such information is typically a URL, which is an address of the CM to be inserted in the program. In this embodiment, for allowing each local station to insert regional CMs, the tag information is presumed to be;

- (1) a code indicating a specific sponsor (hereinafter, "sponsor  
15 code"), and
- (2) a code indicating a specific product (hereinafter, "product code").

The tag information is embedded in the first content, specifically in a position where the CM can be reproduced on time,  
20 allowing for a time taken for the TV commerce terminal 1 to fetch, based thereon, the CM from the CM storage 3. To be specific, as is the upper first content in FIG. 2, the tag information may be wholly embedded in the vicinity of the head, or as is the lower, may be partially embedded in positions wherever possible to be  
25 available in time for CM outputs.

In the system of FIG. 1, such structured first content (video/audio signal and tag information) is transmitted from the TV broadcast device 2 to the TV commerce terminal 1 via the satellite digital broadcasting network 6 in the form of MPEG-TS (transport stream).

FIG. 3 is a bit map showing the structure of the second content (CM) to be stored in the CM storage 3 of FIG. 1. In FIG. 3, the second content includes a video/audio signal and key information of a CM.

10 The key information is used to descramble the video/audio signal of the program included in the first content, and is preferably located at the tail of the second content, preventing the program from being reproduced before the CM's complete reproduction.

15 FIG. 4 is a flowchart showing, in brief, the comprehensive operation of the system of FIG. 1. With reference to FIG. 4, described below is the operation of the system of FIG. 1.

In FIG. 4, first of all, the TV broadcast device 2 placed in a TV broadcasting station stores a digital TV program as the first content (step S1).

The CM storage 3 placed in a regional advertising agency stores, as the second contents, several sponsors' product CMs (step S2).

As an example, the CM storage 3 placed in Osaka stores a sponsor A's CMs targeting Osaka area, made for products of "Aa",

"Ab", "Ac", and the like. Then, to each of those, a URL address is assigned to indicate where the CM is located. For example, assigned to the CM of "Aa" product is "ftp://oosaka.A.co.jp/a".

5 The TV commerce terminal 1 stores location information which tells its own location, and a URL table indicating from where the second contents are to be each fetched (that is, URL address of each CM stored in step S2) (step S3).

10 Next, the TV broadcast device 2 provides, to the CM storage 3 (in each area), key information as for the first content stored in step S1 (step S4). On the other hand, provided from the CM storage 3 (in each area) to the TV broadcast device 2 is the tag information as for the second contents stored in step S2 (step S5).

15 The CM storage 3 (in each area) then embeds the key information given in step S4 to the second contents stored in step S2 (step S6). The TV broadcast device 2 embeds, on the other hand, the tag information given in step S5 in the first content stored in step S1 (step S7).

20 Accordingly, the first content (program) and the second content (CM) are interrelated with each other with the help of the tag information, location information, and URL table. Also, as the key information has been embedded in the CM, the TV commerce terminal 1 has to reproduce the CM first, otherwise no program becomes available.

25 Next, the TV broadcast device 2 broadcasts, via the

satellite digital broadcasting network 6, the first content (video/audio signal and tag information; FIG. 2) to the TV commerce terminals 1 all over the country (step S8).

The TV commerce terminals 1 each receive the first content  
5 broadcast in step S8, extract the CMs stored in step S2, and reproduce the program and CMs for output to the TV 4 (step S9). Thereafter, the system is determined whether to continue its operation (step S10). If determined Yes, the procedure returns to step S1 to repeat the same procedure as above. If No, the system  
10 terminates its operation.

FIG. 5 is a flowchart showing, in brief, the operation (step S9 in FIG. 4) of the TV commerce terminal 1 in FIG. 1.

In FIG. 5, the TV commerce terminal 1 receives the first content via a satellite antenna (step S11), and then extracts the  
15 tag information therefrom (step S12). The TV commerce terminal 1 then selects a CM (to be inserted into the program for reproduction) according to the tag information extracted in step S12, and the location information stored in step S3 (step S13).

Here, in the CM selection processing in step S13, the tag  
20 information and the location information may or may not uniquely determine the CM. If determine, the TV commerce terminal 1 then automatically selects the CM. If not determine, the TV commerce terminal 1 displays some potential CMs and leave those for the user's selection.

25 The TV commerce terminal 1 refers to the location

information and the URL table stored in step S3 to perform URL specification for the CM selected in step S13 (step S14), and then fetches the second content having the URL assigned from the CM storage 3 (step S15).

5           Then, the TV commerce terminal 1 reproduces the video/audio signal of the CM in the second content fetched in step S15 (step S16), and then extracts the key information from the second content (step S17). Thereafter, the TV commerce terminal 1 uses the key information extracted in step S17 to descramble, for  
10 reproduction, the video/audio signal of the program in the first content (step S18). The video/audio signals of the program and the CM reproduced in step S18 are then outputted to the TV 4 with a predetermined timing (step S19). Then, the TV commerce terminal 1 (the procedure returns to the flow in FIG. 4) goes through step  
15 S10.

          In the above operation, "both the location information and the URL table are stored in the TV commerce terminal 1 (step S3)", and then "TV commerce terminal 1 itself selects the CM based thereon (step S13)". Alternatively, the system of FIG. 1 may be  
20 additionally provided with a name server 7 for storing the URL table, and thus the TV commerce terminal 1 may store only the location information.

          If this is the case, the above step S3 is replaced with steps S3a and S3b as follows:

25           "the TV commerce terminal 1 stores the location information

(step S3a), while the name server 7 stores the URL table (step S3b).

Also, the above step S13 is replaced with steps S13a and S13b as follows:

5        "the TV commerce terminal 1 gives the tag information and the location information to the name server 7, and brings the name server 7 to carry out URL specification (step S13a). In response, the name server 7 refers to such given information and the URL table stored therein for URL specification, and then gives the  
10        result obtained thereby back to the TV commerce terminal 1 (step S13b)."

Described next is a specific implementation of this system.  
<processing from program creation to program broadcast  
(corresponding to steps S1 to S8 in FIG. 4)>

15        In FIG. 1, a TV broadcasting station creates a first content, which is an entertainment TV program such as a drama and documentary. Here, this is not restrictive, and any independent firm (subcontractor) will do.

A local advertising agency looks for any sponsor who is  
20        willing to pay for the program (air time). If found, the agency negotiates with the TV broadcasting station (subcontractor) when the program is to be on the air, nationwide, via the satellite digital broadcasting network 6.

The advertising agency also creates a CM, a second content,  
25        for the sponsor.

Then, the TV broadcast device 2 in the TV broadcasting station and the CM storage 3 in the advertising agency exchange key information and tag information therebetween. The TV broadcast device 2 then embeds the tag information in the program, while the CM storage 3 embeds the key information in the CM. Here, the TV broadcasting station may receive a CM from the advertising agency and embed both information therein, or the advertising agency may receive a program from the TV broadcasting station and embed both information therein.

10       The tag information (TVRL; Television Resource Locator) is used to interrelate a program and a CM with each other. Specifically, Such TVRL includes, in addition to the above-described "sponsor" code and "product" code, a "manufacturer" code specifically indicating who produced the product. Here, the  
15       "code" is an identifier (ID) uniquely allocated for companies or products, and typically is the combination of character, symbol, number, and the like.

      The TV broadcast device 2 subjects the program embedded with the tag information to scramble processing, to the extent that  
20       the tag information can be extracted from the scrambled program. Specifically, in the case that the program is transmitted in the form of MPEG-TS, the stream is sectionally assigned for transmission of tag information, and scramble processing is not executed to a transport packet including the section.

25       The key information embedded in the CM is used to descramble



such scrambled program. When the CM is in the form of MPEG video stream, the key information is stored in a user data region located in a predetermined layer (e.g., group-of-picture layer, picture layer, or sequence layer) in the stream. Alternatively, the key  
5 information may be embedded in the MPEG2 video stream by digital watermark, and the MPEG decoding part 140 may decode the MPEG2 video stream so as to extract the key information therefrom.

The TV broadcast device 2 then converts the program into a radio wave so as to broadcast the program nationwide via the  
10 satellite digital broadcasting network 6 in the contracted air time. The broadcast radio wave is received by the user's TV commerce terminal 1 through the satellite antenna, and then converted into TV videos.

<processing from program reception to TV output (corresponding  
15 to step S9 in FIG. 4>

FIG. 6 is a block diagram showing the specific structure of the TV commerce terminal 1 of FIG. 1. In FIG. 6, the TV commerce terminal 1 includes a TV reception part 110, data exchange part 120, video storage part 130, MPEG decoding part 140, display  
20 memory 150, MPU 160, IP communications control part 170, and memory part 180.

The TV reception part 110 receives the radio wave from the TV broadcast device 2, and converts the radio wave into MPEG-TS (may be converted into MPEG-PS or MPEG-ES, but anyhow, does  
25 not affect the essence of the present invention). The MPEG-TS

from the TV reception part 110 is forwarded to the video storage part 130 or the MPEG decoding part 140 via the data exchange part 120.

The video storage part 130 stores the MPEG-TS coming from the data exchange part 120. The MPEG-TS stored in the video storage part 130 is then forwarded to the MPEG decoding part 140 via the data exchange part 120. By forwarding the MPEG-TS via the video storage part 130, the program can be time-shifted for reproduction (i.e., store and then reproduce).

The IP communications control part 170 is connected to the CM storage 3 through the network 5. The memory part 180 previously stores location information and a URL table. The location information stored therein is the user's home address inputted by the user at his/her purchase of the TV commerce terminal 1 (through buttons on a remote controller, for example). The URL table is the one multiplexed on a program, and broadcast with the program from the TV broadcast station 2. The TV reception part 110 receives such URL table, and the memory part 180 stores the same.

The MPU 160 first selects a CM to be inserted in the program, for reproduction, according to the tag information, location information, and URL table. The MPU 160 then refers to the URL table to perform URL specification to the selected CM. Then, through the IP communications control part 170 and the network 5, the MPU 160 extracts the CM (MPEG video stream) applicable to

the specified URL from the CM storage 3.

The MPEG decoding part 140 decodes the MPEG-TS coming from the data exchange part 120 and the MPEG video stream fetched by the MPU 160 so that the video/audio signals of the program and  
5 CM are reproduced.

The MPEG decoding part 140 is additionally provided with a descrambling function, TVRL extracting function, and key information extracting function. In other words, the MPEG decoding part 140 descrambles the MPEG-TS, extracts the tag  
10 information (TVRL) therefrom, and then extracts the key information from the MPEG video stream.

The display memory 150 stores the reproduced video/audio signals.

In the case that the system has been additionally provided  
15 with the name server 7, the memory part 180 stores only the location information. If this is the case, the MPU 160 provides the name server 7 with the tag information and the location information, and brings the name server 7 to select a CM to be inserted in the program, and performs URL specification to the selected CM. In  
20 response, the name server 7 operates as requested, and gives the result obtained thereby back to the MPU 160. The MPU 160 then fetches the applicable CM having the URL assigned from the CM storage 3.

At the time of CM selection, if the tag information,  
25 location information, and URL table do not uniquely determine a

CM, the MPU 160 leaves the CM selection for the user. In such case, the user may tap his/her keyboard (not shown) to input his/her selection (or the MPU 160 may perform CM selection according to its discretion, or at random).

5           With reference to FIG. 7 for flowchart, described next is the operation of such structured TV commerce terminal 1.

FIG. 7 is a flowchart showing the specific operation (processing procedure of the MPU 160 in FIG. 6) of the TV commerce terminal 1 of FIG. 1. In FIG. 7, the MPU 160 first instructs the  
10 TV reception part 110 to convert a broadcasting signal into MPEG-TS (step S31), and then forwards the MPEG-TS to the MPEG decoding part 140 or the video storage part 130 via the data exchange part 120 (step S32).

The MPEG decoding part 140 sequentially decodes the MPEG-TS  
15 coming directly from the TV reception part 110 or via the video storage part 130. At this time, the MPU 160 instructs the MPEG decoding part 140 to extract the tag information from the MPEG-TS (step S33).

The MPU 160 then monitors the MPEG decoding part 140 to  
20 determine whether any new tag information has been extracted during the decoding (step S34). If determined Yes, the MPU 160 goes through the processing of fetching the second content (CM) (step S35). Then, the procedure returns to step S31 to repeat the same processing as above.

25           If determined No in step S35, the MPU 160 monitors the MPEG

decoding part 140 to determine whether a key for descrambling the first content (MPEG-TS corresponding to the program) has been already obtained or not (step S36). If the determination is No, the procedure returns to step S31 to repeat the same processing  
5 as above.

If determined Yes in step S36, the MPU 160 instructs the MPEG decoding part 140 to temporarily stop the decode processing with respect to the first content (step S37), and then decodes the second content (MPEG video stream corresponding to the CM)  
10 so as to extract the key therefrom (step S38). Then, the MPU 160 brings the MPEG decoding part 140 to start again the decode processing (step S39). The procedure then returns to step S31, and repeats the same processing as above.

FIG. 8 is a flowchart showing, in detail, step S35 in FIG. 35, i.e., the second content fetch processing carried out by the MPU 160 in FIG. 6. In FIG. 8, the MPU 160 first performs URL specification based on the TVRL extracted in step S33 in FIG. 7. That is, the MPU 160 perform URL specification to the CM to be inserted in the program for reproduction (step S41).  
15

Next, the MPU 160 fetches, from the CM storage 3 via the IP communications control part 170, the second content having the URL specified in step S41 assigned, and stores the second content in the video storage part 130 (step S42). Then, the procedure returns to the flow in FIG. 8.  
20

<specific example of URL specification processing>  
25

FIG. 9 is a flowchart showing step S41 in FIG. 8, i.e., exemplary URL specification processing (in the case that tag information has "sponsor" code, and the MPU 160 itself performs URL specification) carried out by the MPU 160 in FIG. 6.

5 In FIG. 9, the MPU 160 first analyzes the tag information (TVRL) extracted by the MPEG decoding part 140 from the first content, and extracts a "sponsor" code therefrom (step S51).

Next, the MPU 160 selects, according to the location information and the URL table stored in the memory part 180, and  
10 the "sponsor" code extracted from the tag information in step S51, the second content to be fetched, that is, a CM to be inserted in the program for reproduction (step S52).

Here, the selection processing in step S52 is specifically described.

15 FIG. 10 is a specific URL table stored in the memory part 180 in FIG. 6. The table of FIG. 10 carries sponsors of "A" and "B", and addresses (URL) of CMs regionally classified into "Osaka", "Nagoya", and "Tokyo". As is known from the table, the CMs of the sponsor "B" are regionally one each, but the sponsor "A" has  
20 CMs plural for each region (e.g., CMs of household electrical appliances such as refrigerator and washing machine, and AV equipment such as television and stereo set).

Assuming that the location information stored in the memory part 180 indicates "Osaka", and the "sponsor" code extracted from  
25 the tag information indicates "B", the MPU 160 refers to, in step

S52, the table of FIG. 10, and then selects the CM for Osaka of the sponsor "B".

As an another example, assuming that the location information stored in the memory part 180 indicates "Osaka", and  
5 the "sponsor" code extracted from the tag information indicates "A", the MPU 160 refers to, in step S52, the table of FIG. 10, and selects both CMs of the "household electrical appliances" and "AV equipment" for Osaka of the sponsor "A".

In the case that such selected plural CMs need to be  
10 singularly selected, the MPU 160 displays, for example, a screen on its display (not shown) for the user to select either CM of "household electrical appliance" or "AV equipment". Alternatively, the user may previously input his/her sex, age, hobby, and the like, to the TV commerce terminal 1 through a  
15 keyboard (not shown), for example, and the MPU 160 may perform CM selection based thereon.

Referring back to FIG. 9, the MPU 160 then performs URL specification by referring to the URL table stored in the memory part 180. That is, the MPU 160 specifies the address (URL) of  
20 the second content (CM) selected in step S52 (step S53). Thereafter, the procedure returns to the flow in FIG. 8.

Herein, the URL table stored in the memory part 180 is the one obtained from the TV broadcast device 2 by air. Or, the URL table may be previously stored in the memory part 180 at the  
25 shipment of the TV commerce terminal 1.

The memory part 180 in the TV commerce terminal 1 may store, instead of such national URL table as in FIG. 10, a regional URL table having only information relevant to the area where the TV commerce terminal 1 is placed.

5 In order to have the memory part 180 store the regional URL table, one manner is exemplarily described next. That is, the TV broadcast device 2 broadcasts the national URL table, and the TV commerce terminal 1 receives that. Then, as shown in FIG. 11, the TV commerce terminal 1 extracts, from the national URL table, only information relevant to the area where the TV commerce terminal 1 is placed. The regional URL table is thus generated.

Specifically, the MPU 160 extracts, from the national URL table received by the TV reception part 110, the information relevant to the area of the TV commerce terminal 1 based on the location information stored in the memory part 180. Thus generated is the regional URL table having only the extracted information, and then the table is stored in the memory part 180. Accordingly, the amount of information stored in the memory part 180 is reduced.

20 FIG. 12 is a flowchart showing step S41 in FIG. 8, i.e., another exemplary URL specification processing (in the case that tag information has "sponsor" code, and the MPU 160 asks a name server 7 for URL specification) carried out by the MPU 160 in FIG. 6.

25 In FIG. 12, the MPU 160 first analyzes the tag information



(TVURL) extracted from the first content, and then extracts the "sponsor" code therefrom (step S61).

Here, stored in the memory part 180 are the location information and the address of the name server 7 having the URL table stored (e.g., "osaka.name.com").

Next, the MPU 160 transmits, to the name server 7 via the IP communications control part 170, the "sponsor" code extracted in step S61 and the location information stored in the memory part 180 (step S62).

10 Since having the URL table stored, the name server 7 carries out, in place of the MPU 160, the above-described CM selection processing (step S52) and URL specification processing (step S53).

In detail, based on the location information and "sponsor" code given in step S62, and the stored URL table, the name server 15 7 selects a second content to be fetched, that is, a CM to be inserted in the program (step S63). The name server 7 then specifies the URL by referring to the URL table, that is, specifies the address (URL) of the second content (CM) selected in step S63 20 (step S64), and gives the result obtained thereby back to the TV commerce terminal 1.

Next, the MPU 160 receives the URL responded back from the name server 7 (step S65). The procedure then returns to the flow in FIG. 9.

25 Herein, if the CM have been plurally selected in step S64,

and if there needs to singularly select one thereamong, the name server 7 leave the CM selection for the user via the TV commerce terminal 1.

FIG. 13 is a flowchart showing step S41 in FIG. 8, i.e.,  
5 still another exemplary URL specification processing (in the case that tag information has "product" code, and the MPU 160 asks the name server 7 for URL specification) carried out by the MPU 160 in FIG. 6.

In FIG. 13, the MPU 160 first analyzes the tag information  
10 (TVRL) extracted by the MPEG decoding part 140 from the first content, and then extracts the "product" code therefrom (step S71).

Here, stored in the memory part 180 are the location  
information and the address of the name server 7 having the URL  
15 table stored (e.g., "osaka.name.com").

The MPU 160 then transmits the "product" code extracted in  
step S71 and the location information stored in the memory part  
180 to the name server 7 (addressed to its URL) via the IP  
communications control part 170 (step S72).

20 The name server 7 has the URL table stored, and selects a second content to be fetched, i.e., selects a CM to be inserted in the program (step S73). This selection is made based on the "product" code and the location information given in step S72, and the URL table stored in the name server 7.

25 The selection processing in step S73 is carried out next

below, for example.

Assuming that the location information stored in the memory part 180 indicates "Osaka", and the "product" code informed by the MPU 160 is "sponsor A's household electrical appliances", the name server 7 refers to, in step S73, the table of FIG. 10, and then selects the CM for Osaka of the "sponsor A's household electrical appliances".

Referring back to FIG. 13, the name server 7 then specifies the URL by referring to the URL table, that is, specifies the URL of the second content (CM) selected in step S73 (step S74). The name server 7 then gives the result obtained thereby back to the TV commerce terminal 1.

The MPU 160 then receives the resultant URL transmitted by the name server 7 (step S75). The procedure then returns to the flow in FIG. 9.

As described above, in this embodiment, each second content stored on the network 5 (the CM storage 3 thereon) is assigned a URL, and a program (first content) to be broadcast (by the TV broadcast device 2 via the satellite digital broadcasting network 6) is embedded with tag information. The tag information is the one used for URL specification to a CM interrelated with the program for reproduction. Based on such tag information embedded in the received program, the TV commerce terminal 1 first specifies the URL, and then fetches a CM having the URL assigned. Therefore, the CM fetched (from the CM storage 3) in such manner

can be appropriately interrelated with the program. Accordingly, the user can be provided with a program to be broadcast together with his/her desired CM stored on the network 5, which are interrelated with each other.

5           Noted herein is that, the tag information has a "sponsor" code or a "product" code, and the TV commerce terminal 1 stores the location information indicating where the terminal 1 is. Once received the program, the TV commerce terminal 1 refers to a table indicating, as for each CM, the URL, the sponsor and/or the product,  
10 and a targeting area, and specifies the URL of the CM matching with the name or identifier of the sponsor and/or product in the tag information embedded in the program, and with the area of the terminal. In this manner, a program to be broadcast nationwide through a satellite broadcasting network can be interrelated with  
15 a regional CM of a desired sponsor and/or a product made specifically for the area where terminal is located (i.e., the area where a user of the terminal lives), and provided to users all over the country.

In this embodiment, the tag information is exemplarily a  
20 "sponsor" code or a "product" code. However, this is not restrictive, and the tag information may be anything as far as interrelating a program to be broadcast and a CM on the network.

For example, in this embodiment, the tag information and the URL table are described as being independent from each other.  
25 However, the tag information may be such URL table as shown in

FIG. 14. The table in FIG. 14 has URLs for regional CMs. The TV commerce terminal 1 stores the location information, and once received a program, performs URL specification to a CM made for the area of the terminal 1 by referring to the URL table of FIG. 14 embedded in the program as the tag information, and the location information.

Alternatively, the tag information may be an advertising period table as shown in FIG. 15. In the table in FIG. 15, each advertising period has each different sponsor (e.g., a period from February 1, 2000 to March 1, 2000, a period from March 2, 2000 to December 31, 2000, and the like). Having previously stored the location information and the URL table as shown in FIG. 10, for example, and once received a program, the TV commerce terminal 1 first selects a sponsor according to the advertisement period table in FIG. 15 which has been embedded in the program as the tag information, and the current time. Thereafter, by referring to the location information and the URL table of FIG. 10, the TV commerce terminal 1 carries out URL specification to a CM of the selected sponsor and targeting the area of the terminal 1. As an example, assuming that today is February 10, 2000, first by referring to the advertisement period table in FIG. 15, the sponsors "A" and "D" are selected as found in the period range of February 1, 2000 to March 1, 2000. Thereafter, by referring to the URL table in FIG. 10, URL specification is carried out with respect to the CMs of the sponsor "A" and "D". As such, by

embedding the advertisement period table in the program as the tag information, the CMs to be inserted in the program may vary in sponsor according to the advertisement period (e.g., each different sponsor for February 1, 2000 to March 1, 2000).

5           The tag information may be a user's watching status table as shown in FIG. 16. The table in FIG. 16 has each different sponsor depending on the user's watching status (e.g., the user watches the program real time, or records the program for later). The TV commerce terminal 1 previously stores the location  
10 information and the URL table in FIG. 10, for example. Once received a program, the TV commerce terminal 1 first selects a sponsor based on the user's watching status table in FIG. 16 embedded in the program as the tag information, and the actual user's watching status. Thereafter, based on the location  
15 information and the URL table in FIG. 10, the TV commerce terminal 1 performs URL specification to a CM made by the selected sponsor and for the area of the terminal 1. For example, if the user's watching status is "watch real time", based on the user's watching status table in FIG. 16, the applicable sponsors "A" and "D" are  
20 selected. Thereafter, based on the URL table in FIG. 10, URL specification is done with respect to the CMs of the sponsors "A" and "D". As such, by embedding the user's watching status table in the program, the CMs varied in sponsor can be inserted depending on how the program is watched by the user (e.g., watched real time,  
25 or recorded for later).

In this embodiment, the tag information has the "sponsor" code or "product" code. Thus, in the case that the TV commerce system in FIG. 1 is additionally provided with the name server 7, the TV commerce terminal 1 gives the "sponsor" code or "product" code on the tag information, and the location information to the name server 7, and then brings the name server 7 to perform CM selection and URL specification. Alternatively, instead of the "sponsor" code or the "product" code for CM selection, a "program" ID specifying the program (to be embedded with the information) may be added to the tag information. If this is the case, the TV commerce terminal 1 informs the "program ID" on the tag information to the name server 7. The name server 7 then responds, back to the terminal 1, the applicable URL (or the URL table) of the CM made by the sponsor corresponding to the informed ID.

As is known from the above, by the tag information having the "program ID", and by the TV commerce terminal 1 informing the name server 7 of the "program ID" and receiving the applicable URL of the CM made by the sponsor of the program from the name server 7, the sponsor (of the program) can change the interrelationship between the program and the CM through the name server 7. That is, the sponsor can change which CM is to be inserted in the program. For example, the sponsor may previously determine, for each CM, how many times the CM to be fetched. When a certain CM is fetched for the determined number of times (in other words, when the name server 7 informs the URL address of

a certain CM back to the terminal 1 for the determined number of times), the name server 7 starts informing another CM's URL back to the terminal 1.

While the invention has been described in detail, the foregoing description is in all aspects illustrative and not restrictive. It is understood that numerous other modifications and variations can be devised without departing from the scope of the invention.



WHAT IS CLAIMED IS:

1. A terminal for receiving a first content to be broadcast and fetching a second content stored on a network, and interrelating the received first content and the fetched second content with each other for reproduction and output, wherein

5       the second content is plurally stored on the network, said second content is assigned a URL indicating where the second content is stored on said network, and

      the first content is embedded with tag information used to specify the URL of the second content to interrelate the first  
10       and second contents with each other for reproduction and output, and

      said terminal comprises:

          reception means for receiving the first content;

          fetch means for fetching the second content on the  
15       network; and

          reproduction and output means for interrelating the first content received by said reception means and the second content fetched by said fetch means for reproduction and output, wherein

20       said fetch means refers to the tag information embedded in the first content received by said reception means to specify any one URL, and fetching the second content having the URL assigned.

2. The terminal according to claim 1, wherein said first content is a program to be broadcast nationwide through a satellite broadcasting network,

said second content is a regional CM,

5        said tag information has a name or an identifier of a sponsor and/or a product, and

said terminal further comprises:

location storage means for storing location information indicating in which area the terminal is, wherein

10        as for the CM stored on said network, said fetch means refers to a table indicating the URL, the sponsor and/or the product, and a targeting area, and specifies the URL of the CM matching with the name or identifier of the sponsor and/or product in the tag information embedded in the program received by said reception  
15 means, and with the area of the terminal.

3. The terminal according to claim 2, further comprising table storage means for storing said table, wherein

said fetch means specifies, on its own, said URL by referring to the table stored in said table storage means.

4. The terminal according to claim 2, wherein said fetch means brings a name server, which has said table stored, to specify said URL by providing said tag information and said location information thereto.

5. The terminal according to claim 1, wherein said first content is scrambled, and

said second content is embedded with key information used to descramble said first content, and

5 said reproduction and output means

extracts said key information from said second content fetched by said fetch means,

descrambles said first content by the key information, and

10 interrelates the first and second contents with each other for reproduction and output.

6. The terminal according to claim 5, wherein said second content is in a form of MPEG2 video stream,

said key information is embedded in a user data region located in a predetermined layer of said MPEG2 video stream, and

5 said reproduction and output means extracts said key information from said user data region.

7. The terminal according to claim 6, wherein said predetermined layer is a group-of-picture layer.

8. The terminal according to claim 6, wherein said predetermined layer is a picture layer.

9. The terminal according to claim 6, wherein said predetermined layer is a sequence layer.

10. The terminal according to claim 5, wherein said second content is in a form of MPEG2 video stream,

said key information is embedded in said MPEG2 video stream by digital watermark, and

5       said reproduction and output means decodes said MPEG2 video stream, and extracts said key information therefrom.

11. The terminal according to claim 1, wherein said second content is predetermined by a timing for output, and

said fetch means prefetches the second content before the timing to allow said reproduction and output means to output the  
5       second content with the timing.

12. The terminal according to claim 1, wherein said tag information has the URL of the second content to be interrelated with the first content for reproduction and output, and

said fetch means fetches the second content having the URL  
5       found in said tag information assigned.

13. A content providing system for interrelating a first content to be broadcast and a second content stored on a network, said system comprising:

a broadcast device for broadcasting the first content;  
5 a storage which is provided on the network, and stores a plurality of the second contents; and

a terminal for receiving the first content broadcast by said broadcast device and fetching the second content from said storage, and interrelating the received first content and the fetched  
10 second content with each other for reproduction and output, wherein

said second content is assigned a URL indicating where the second content is stored on said network,

said broadcast device embeds, in said first content, tag  
15 information used to specify the URL of the second content to be interrelated with the first content with each other for reproduction and output, and

said terminal specifies any one URL based on the tag information embedded in the received first content, and fetches  
20 the second content having the URL assigned.

14. The content providing system according to claim 13, wherein said first content is a program to be broadcast nationwide through a satellite broadcasting network,

said second content is a regional CM,  
5 said tag information has a name or an identifier of a sponsor and/or a product, and  
said terminal

knows its own location, and

refers to, as for the CM stored in said storage, a table  
10 indicating the URL, the sponsor and/or the product, and a  
targeting area, and specifies the URL of the CM matching with the  
name or identifier of the sponsor and/or the product in the tag  
information embedded in the program received by said reception  
means, and with the area of the terminal.

15. The content providing system according to claim 15,  
wherein said terminal

further stores said table, and  
specifies said URL on its own.

16. The content providing system according to claim 14,  
further comprising a name server having said table stored, wherein  
said terminal brings said name server to specify said URL  
by providing said tag information and said location information

5 thereto, and

said name server specifies said URL, and responds the URL  
back to said terminal.

17. The content providing system according to claim 14,  
wherein said broadcast device further broadcasts said table, and  
said terminal receives and stores the table broadcast by  
said broadcast device.

18. The content providing system according to claim 15,  
wherein said broadcast device further broadcasts said table, and  
said terminal

receives the table broadcast by said broadcast device,  
5 selects, from the received table, only information  
relevant to the area of the terminal based on the location  
information stored therein, and

stores a newly-generated table including the selected  
information only.

19. The content providing system according to claim 13,  
wherein said second content is predetermined with a timing for  
output, and

said broadcast device embeds the tag information in a  
5 temporal position in said first content where said terminal can  
fetch the second content before the timing.

20. The content providing system according to claim 13,  
wherein said first content is scrambled,

said broadcast device gives, to said storage, key  
information used to descramble said first content before  
5 broadcasting the first content, and

said storage embeds the given key information in the second  
content stored therein, and

said terminal

extracts said key information from the second content  
10 fetched from said storage,  
descrambles said first content by the key information,  
and  
interrelates the first and second contents with each  
other for reproduction and output.

21. The content providing system according to claim 13,  
wherein said tag information has the URL of the second content  
to be interrelated with the first content to be broadcast by said  
broadcast device for reproduction and output, and  
5 said terminal fetches, from said storage, the second  
content corresponding to said URL.



## ABSTRACT OF THE DISCLOSURE

A system interrelating a program to be broadcast with a CM stored on a network 5 is implemented. The CMs (second contents) stored on the network 5 are each assigned a URL, while the program (first content) to be broadcast is embedded with tag information, which is used to specify the URL of the CM to be interrelated with the program for reproduction and output. Based on the tag information embedded in the received program, a TV commerce terminal 1 specifies any one URL and then fetches the CM having the URL assigned.

FIG. 1

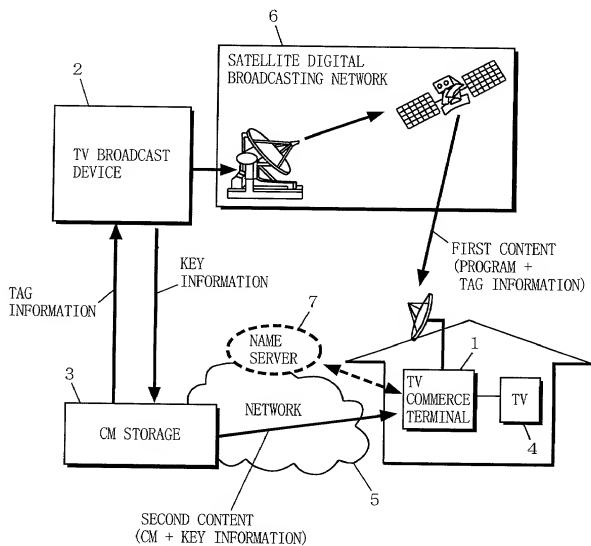


FIG. 2

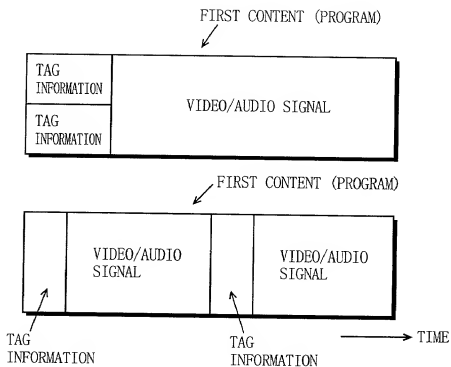


FIG. 3




FIG. 4

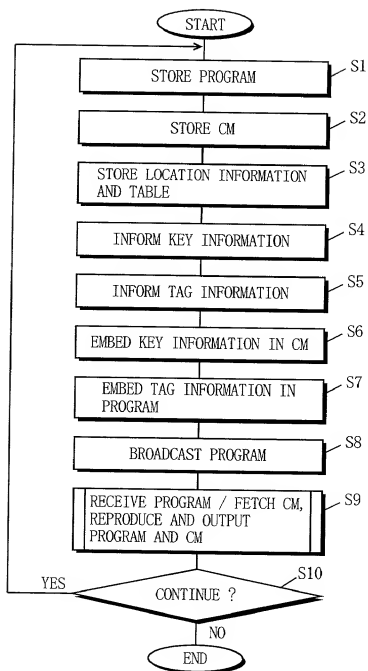


FIG. 5

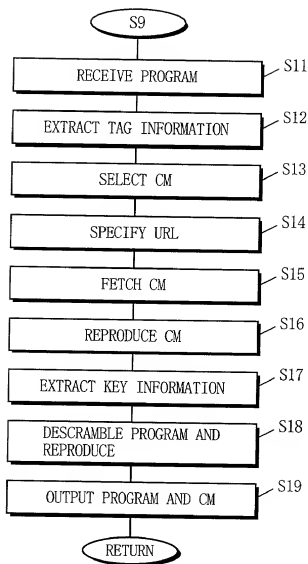


FIG. 6

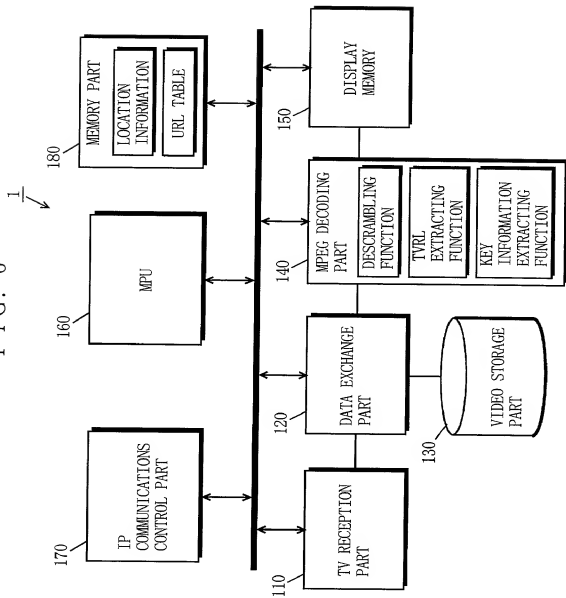


FIG. 7

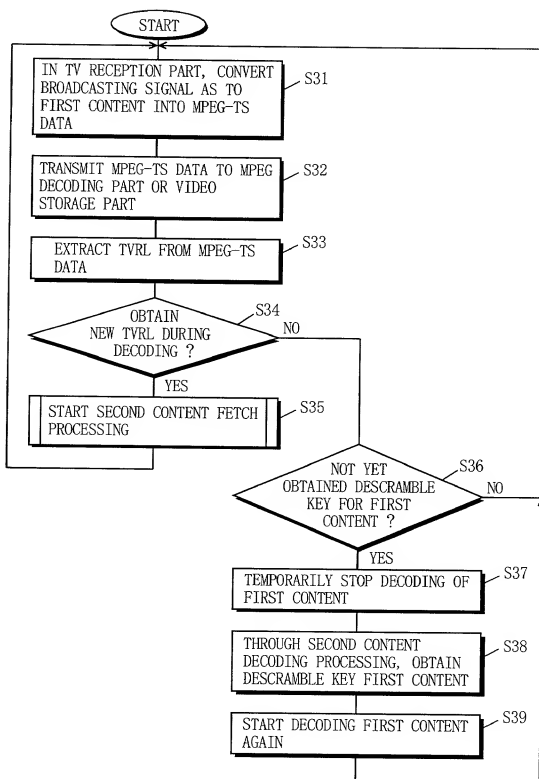


FIG. 8




FIG. 9

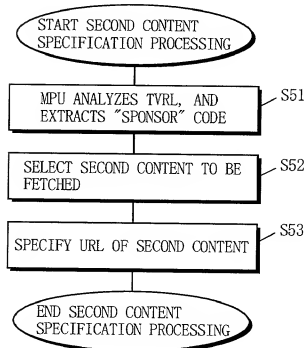




FIG. 10

SPONSOR	AREA	URL
SPONSOR A	OSAKA	HOUSEHOLD ELECTRICAL APPLIANCE ftp://osaka.a.co.jp/ HOUSEHOLD ELECTRICAL APPLIANCE <sub>cm</sub>
		AV ftp://osaka.a.co.jp/AV <sub>cm</sub>
		:
	NAGOYA	HOUSEHOLD ELECTRICAL APPLIANCE ftp://nagoya.a.co.jp/ HOUSEHOLD ELECTRICAL APPLIANCE <sub>cm</sub>
		AV ftp://nagoya.a.co.jp/AV <sub>cm</sub>
		:
	TOKYO	HOUSEHOLD ELECTRICAL APPLIANCE ftp://tokyo.a.co.jp/ HOUSEHOLD ELECTRICAL APPLIANCE <sub>cm</sub>
		AV ftp://tokyo.a.co.jp/AV <sub>cm</sub>
		:
	:	:
SPONSOR B	OSAKA	ftp://osaka.b.co.jp/cm
	NAGOYA	ftp://nagoya.b.co.jp/cm
	TOKYO	ftp://tokyo.b.co.jp/cm
		:
:	:	:

FIG. 11

NATIONAL  
TABLE

SPONSOR	AREA	URL
SPONSOR A	OSAKA	HOUSEHOLD ELECTRICAL APPLIANCE ftp://osaka.a.co.jp/ HOUSEHOLD ELECTRICAL APPLIANCEcm
		AV ftp://osaka.a.co.jp/AVcm
		:
		:
	NAGOYA	HOUSEHOLD ELECTRICAL APPLIANCE ftp://nagoya.a.co.jp/ HOUSEHOLD ELECTRICAL APPLIANCEcm
		AV ftp://nagoya.a.co.jp/AVcm
		:
		:
	TOKYO	HOUSEHOLD ELECTRICAL APPLIANCE ftp://tokyo.a.co.jp/ HOUSEHOLD ELECTRICAL APPLIANCEcm
		AV ftp://tokyo.a.co.jp/AVcm
		:
		:
SPONSOR B	OSAKA	ftp://osaka.b.co.jp/cm
	NAGOYA	ftp://nagoya.b.co.jp/cm
	TOKYO	ftp://tokyo.b.co.jp/cm
	:	:
	:	:
:	:	:

BASED ON LOCATION INFORMATION,  
EXTRACTS ONLY INFORMATION RELEVANT  
TO THE AREA OF THE TERMINAL

REGIONAL  
TABLE

SPONSOR	URL	
SPONSOR A	HOUSEHOLD ELECTRICAL APPLIANCE	ftp://osaka.a.co.jp/ HOUSEHOLD ELECTRICAL APPLIANCEcm
	AV	ftp://osaka.a.co.jp/AVcm
	:	:
SPONSOR B	ftp://osaka.b.co.jp/cm	
:	:	

FIG. 12

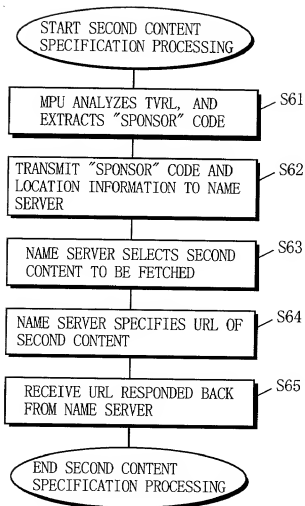


FIG. 13

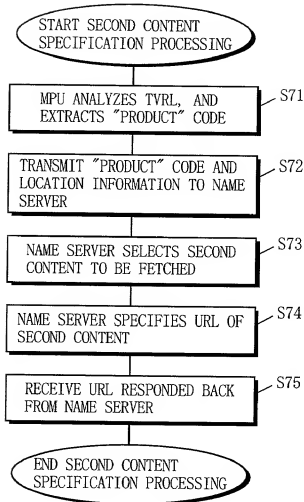


FIG. 14

AREA	URL
OSAKA	ftp://oosaka.b.co.jp/cm
NAGOYA	ftp://nagoya.b.co.jp/cm
TOKYO	ftp://tokyo.b.co.jp/cm
⋮	⋮

F I G. 1 5

ADVERTISEMENT PERIOD	SPONSOR
2000. 2. 1~2000. 3. 1	SPONSOR A
	SPONSOR D
	⋮
2000. 3. 2~2000. 12. 31	SPONSOR S
	SPONSOR H
	⋮
⋮	⋮

F I G. 1 6

USER'S WATCHING STATUS	SPONSOR
WATCHED REAL TIME	SPONSOR A
	SPONSOR D
	⋮
RECORDED FOR LATER	SPONSOR S
	SPONSOR H
	⋮
⋮	⋮

**DECLARATION AND POWER OF ATTORNEY FOR U.S. PATENT APPLICATION**

(X) Original    ( ) Supplemental    ( ) Substitute    ( ) PCT    ( ) Design

As a below named inventor, I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that I verily believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

**CONTENT PROVIDING SYSTEM AND TERMINAL USED THEREIN**

Title: \_\_\_\_\_  
 \_\_\_\_\_

of which is described and claimed in:

- (X) the attached specification, or  
 ( ) the specification in the application Serial No. \_\_\_\_\_ filed \_\_\_\_\_;  
 and with amendments through \_\_\_\_\_ (if applicable), or  
 ( ) the specification in International Application No. PCT/ \_\_\_\_\_, filed \_\_\_\_\_, and as amended  
 on \_\_\_\_\_ (if applicable).

I hereby state that I have reviewed and understand the content of the above-identified specification, including the claims, as amended by any amendment(s) referred to above.

I acknowledge my duty to disclose to the Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56.

I hereby claim priority benefits under Title 35, United States Code, §119 (and §172 if this application is for a Design) of any application(s) for patent or inventor's certificate listed below and have also identified below any application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

COUNTRY	APPLICATION NO.	DATE OF FILING	PRIORITY CLAIMED
Japan	316719/1999	November 8, 1999	Yes

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

APPLICATION SERIAL NO.	U.S. FILING DATE	STATUS: PATENTED, PENDING, ABANDONED

And I hereby appoint John T. Miller, Reg. No. 21,120; Michael R. Davis, Reg. No. 25,134; Matthew M. Jacob, Reg. No. 25,154; Jeffrey Nilton, Reg. No. 25,408; Warren M. Cheek, Jr., Reg. No. 33,367; Nils E. Pedersen, Reg. No. 33,145 and Charles R. Watts, Reg. No. 33,142, who together constitute the firm of WENDEROTH, LIND & PONACK, L.L.P., attorneys to prosecute this application and to transact all business in the U.S. Patent and Trademark Office connected therewith.

I hereby authorize the U.S. attorneys named herein to accept and follow instructions from Ogasawara Patent Office as to any action to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. attorneys and myself. In the event of a change in the persons from whom instructions may be taken, the U.S. attorneys named herein will be so notified by me.

Send Correspondence to

WENDEROTH, LIND & PONACK, L.L.P.  
2033 K Street, N.W., Suite 800  
Washington, DC 20006

Direct Telephone Calls to:

WENDEROTH, LIND & PONACK, L.L.P.  
Area Code (202) 721-8200

Direct Facsimile Messages to:  
Area Code (202) 721-8250

<b>Full Name of First Inventor</b>	<b>FAMILY NAME</b> TANAKA	<b>FIRST GIVEN NAME</b> Tsutomu	<b>SECOND GIVEN NAME</b>
<b>Residence &amp; Citizenship</b>	<b>CITY</b> Nishinomiya	<b>STATE OR COUNTRY</b> Japan	<b>COUNTRY OF CITIZENSHIP</b> Japan
<b>Post Office Address</b>	<b>ADDRESS</b> 10-5-38, Uegahara, Nishinomiya-shi,	<b>CITY</b> Hyogo-ken, Japan	<b>STATE OR COUNTRY</b> ZIP CODE 662-0884
<b>Full Name of Second Inventor</b>	<b>FAMILY NAME</b> MURAKAMI	<b>FIRST GIVEN NAME</b> Hiroki	<b>SECOND GIVEN NAME</b>
<b>Residence &amp; Citizenship</b>	<b>CITY</b> Suita	<b>STATE OR COUNTRY</b> Japan	<b>COUNTRY OF CITIZENSHIP</b> Japan
<b>Post Office Address</b>	<b>ADDRESS</b> 2-8-5, Tukumodai, Suita-shi,	<b>CITY</b> Osaka-fu, Japan	<b>STATE OR COUNTRY</b> ZIP CODE 565-0862
<b>Full Name of Third Inventor</b>	<b>FAMILY NAME</b> KOKADO	<b>FIRST GIVEN NAME</b> Takeshi	<b>SECOND GIVEN NAME</b>
<b>Residence &amp; Citizenship</b>	<b>CITY</b> Kyotanabe	<b>STATE OR COUNTRY</b> Japan	<b>COUNTRY OF CITIZENSHIP</b> Japan
<b>Post Office Address</b>	<b>ADDRESS</b> 5-4-5, Osumigaoka, Kyotanabe-shi,	<b>CITY</b> Kyoto-fu, Japan	<b>STATE OR COUNTRY</b> ZIP CODE 610-0351
<b>Full Name of Fourth Inventor</b>	<b>FAMILY NAME</b>	<b>FIRST GIVEN NAME</b>	<b>SECOND GIVEN NAME</b>
<b>Residence &amp; Citizenship</b>	<b>CITY</b>	<b>STATE OR COUNTRY</b>	<b>COUNTRY OF CITIZENSHIP</b>
<b>Post Office Address</b>	<b>ADDRESS</b>	<b>CITY</b>	<b>STATE OR COUNTRY</b> ZIP CODE

Full Name of Fifth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

Full Name of Sixth Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

Full Name of Seventh Inventor	FAMILY NAME	FIRST GIVEN NAME	SECOND GIVEN NAME
Residence & Citizenship	CITY	STATE OR COUNTRY	COUNTRY OF CITIZENSHIP
Post Office Address	ADDRESS	CITY	STATE OR COUNTRY ZIP CODE

I further declare that all statements made herein of my own knowledge are true, and that all statements on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

1st Inventor Tsutomu Tanaka Tsutomu TANAKA Date November 1, 2000  
 2nd Inventor Hiroki Murakami Hiroki MURAKAMI Date November 1, 2000  
 3rd Inventor Takeshi Kokado Takeshi KOKADO Date November 1, 2000  
 4th Inventor \_\_\_\_\_ Date \_\_\_\_\_  
 5th Inventor \_\_\_\_\_ Date \_\_\_\_\_  
 6th Inventor \_\_\_\_\_ Date \_\_\_\_\_  
 7th Inventor \_\_\_\_\_ Date \_\_\_\_\_

The above application may be more particularly identified as follows:

U.S. Application Serial No. \_\_\_\_\_ Filing Date \_\_\_\_\_  
 Applicant Reference Number FP-0691 Atty Docket No. \_\_\_\_\_  
 Title of Invention CONTENT PROVIDING SYSTEM AND TERMINAL USED THEREIN